

Alliance for the Chesapeake Bay Turnkey Forest Planting Contractor Bid
Fall 2021: South-central Pennsylvania

The Alliance for the Chesapeake Bay is seeking bids from forest planting contractors to implement turnkey forest establishment and maintenance services on 34.65 acres of riparian forest buffer in south-central Pennsylvania during the fall 2021 planting season.

Scope of Work

The contractor shall be responsible for providing all equipment, material and supplies to complete the tree planting projects and maintenance according to the planting specifications & contractor's responsibilities listed below. The contractor shall scalp away the turf at each tree seedling planting location, hand plant (dibble bar or hoedad only) approximately 9562 bare-root tree seedlings, install approximately 9562 five-foot (5') perforated tree shelters, with 1"x1" white oak stakes, reversible ties, and netting on approximately 34.65 acres between October 15, 2021 and December 10, 2021. Trees will be planted on 3 properties in Lancaster and York Counties, Pennsylvania; site locations are indicated on the project spreadsheet. Maintenance will consist of mowing, spraying systemic herbicide around each tree shelter, and straightening/re-staking tree shelters twice a growing season for three growing seasons from 2022-2024.

Minimum Qualifications of a Bidder

1. The Bidder will be a reputable contractor with a minimum of five (5) years of experience in planting bareroot tree seedlings, installing tree shelters with stakes & bird nets and possess current insurance and pesticide applicators license.
2. The Bidder may be asked to provide three references that can verify qualifications above and copies of current insurance and license. A Bidder that does not meet the minimum qualifications will be rejected.

Planting Specifications and Contractor's Responsibilities

1. The contractor will mow each site within one month of the planting, if deemed necessary by the Alliance for the Chesapeake Bay (Alliance).
2. The contractor will provide all labor, planting stock, materials, and equipment to fulfill all aspects of the scope of work as outlined above. Species and quantities of tree seedlings to be planted are included in the planting plans provided by the Alliance. The contractor agrees to follow the planting specifications provided in the tree planting plan for each property unless otherwise directed and approved by Alliance personnel.
3. The contractor shall scalp away turf at 5" x 5" at the spot of each tree seedling.
4. All tree seedlings will be hand planted (dibble bar or hoedad only) at the spacing grid specified in the tree planting plan for the site, as prepared by the Alliance, using accepted industry standards, methods, and equipment.
5. All seedlings when transported and/or stored on a planting site will always be protected with reflective seedling tarps or other appropriate means to prevent overheating and drying out of the seedlings. There will be no root pruning of the seedlings unless approved by the Alliance.

6. The contractor will dip all tree seedling roots in a water retention polymer such as Terra-Sorb, Soil Moist, or similar product, with approval of the Alliance, prior to planting. The contractor will provide the Terra- Sorb, Soil Moist, or similar product.
7. The contractor agrees to begin planting at a date mutually acceptable to both parties and to complete the planting projects by no later than December 10, 2021 (absolutely no exceptions). The planting shall not be done when excess water is standing on the site, or when the ground is frozen or extremely dry.
8. The contractor will plant seedlings at the depth the seedlings were grown, which is to be the root collar. Planting holes will be properly closed to ensure that all air pockets are removed.
9. The contractor will plant each tree seedling in such a manner that "J" and "U" roots will not occur, and each tree seedling will be firmed with mineral soil packed in and around the roots so the seedling cannot be pulled out of the ground by light tugs.
10. The contractor will provide 9562 seedlings (according to the requested species selection and quantities) 9562 five-foot (5') perforated tree shelters and 1" x 1" x 5' white oak stakes, reversible fastening ties, and bird mesh nettings.
11. The contractor will install the tree shelters around each designated tree in a manner that prevents each seedling from being constricted by the shelter fastening ties. The straight edge of the tree shelters must be installed 2-5 centimeters into the soil. The flared edge is the top end of the tree shelter, on which the bird netting is placed. All tree shelter fastening ties will be pulled tightly and firmly against each tree shelter stake. Bird nets will be installed on each tree shelter in a manner to prevent bird entry into the shelter and far enough to keep the nets from blowing off in the wind.
12. The contractor will install each tree shelter stake in a straight and upright manner and to a minimum depth in the soil of ten to twelve inches (10"-12"). The top of each installed stake will be no greater than three inches (3") above the top fastening tie of the shelter when it is tightened. All stakes will be placed on the upstream side of the tree shelters so that flood waters contact the stakes prior to the shelters.
13. The contractor will properly install all tree shelters with stakes and bird netting on each tree seedling on the same day that each seedling is planted.
14. The contractor will repair, replace, or reimburse for damage to any property beyond ordinary wear and tear in the performance of the contract.
15. All work performed will be certified by the Alliance as to acceptability and adherence to planting plans and standards before the Alliance will compensate the contractor for any work performed.
16. The final number of planting sites, seedlings, tree shelters, stakes and nets may change prior to the commencement of this contract. The Alliance will notify the contractor of all changes as they occur. Any additions or subtractions to the list of planting sites will be adjusted according to per unit prices in the bid provided.

Maintenance Specifications and Contractor's Responsibilities


1. The contractor will complete 2 annual maintenance visits during the 2022, 2023, and 2024 growing seasons. The first visit shall take place during May-June and the second visit shall take place during late August-September.

2. At maintenance visits, all seedlings will receive a 3' diameter systemic herbicide spray treatment around each tree shelter.
3. The site will also be mowed at each maintenance visit. Mowing will be done in strips a minimum of 5' wide on either side of the planted rows.
4. Shelters and stakes will be maintained throughout the period, which includes straightening and stabilizing shelters, removing bird nets, and replacing stakes.

Site Specific Details and maps AVAILABLE UPON REQUEST - Email Ryan Davis (see address below) for full suite of information

Name	Ac	# Trees	County	Address	Prep mow?
TW	2.59	715	York	Stewartstown, PA	yes
KDV	12.3	3382	Lancaster	Peach Bottom PA	yes
JG	19.76	5465	York	Wellsville PA	yes
TOTAL	34.65	9562			

Map of Sites

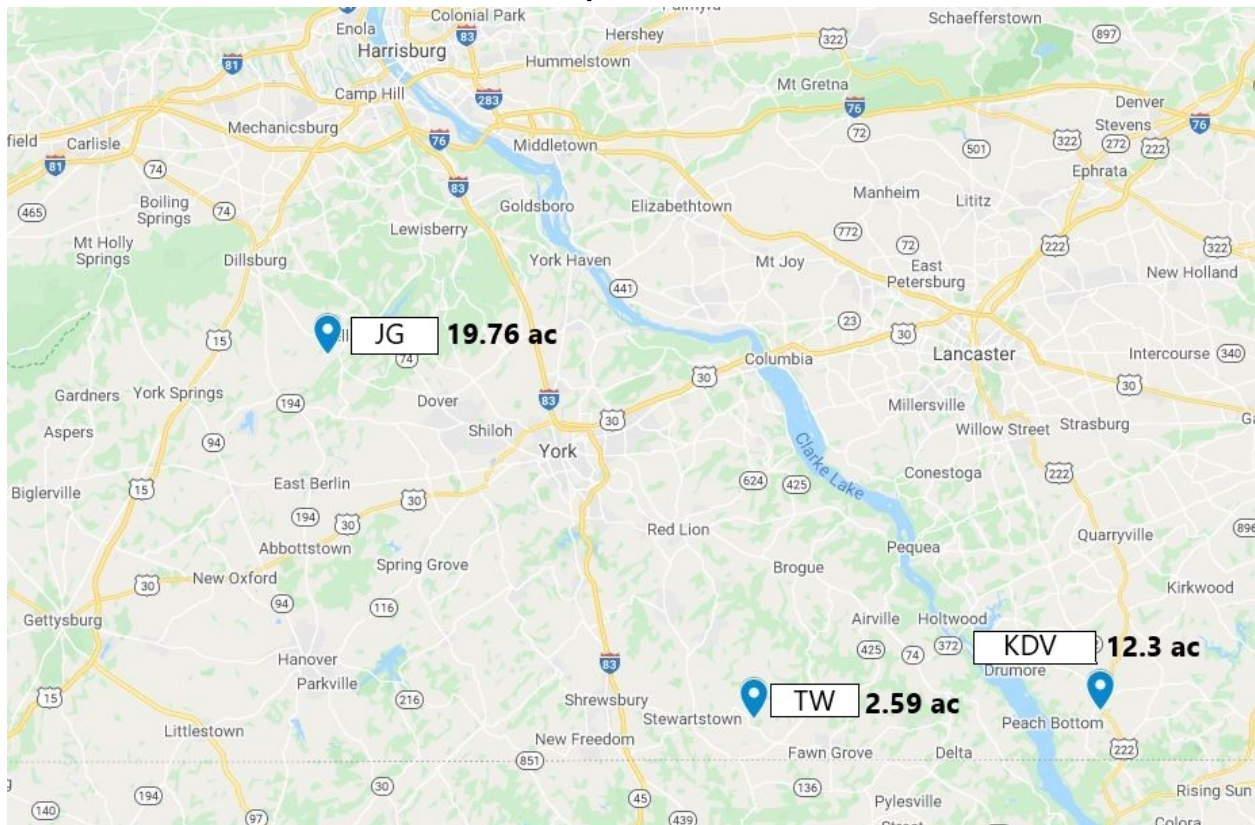

RETURN BID SHEET (below) Electronically to: rdavis@allianceforthebay.org

All questions about this bid package should be made directly to Ryan Davis through email (see above) or by phone at 757-377-3200

Bid Sheet - Alliance for the Chesapeake Bay Turnkey Forest Planting Contractor Bid

Return Bid Sheet By Wednesday, September 8th, 2021

Task	Price per unit/acre	Total Bid Price
Site prep mow a total of 34.65 acres on 3 sites in South-central Pennsylvania		
Hand-plant 9,562 bareroot tree seedlings in accordance to the planting plans specifications		
Provide all materials for and install 9,562 perforated tree shelters (5') with white oak stakes (5'), reversible ties, and bird netting		
Provide 9,562 seedlings in accordance with the provided planting plans		
Mow strips at least 5' wide along rows twice on all sites during 2022-2024 growing seasons		
Spray herbicide rings around each tree shelter (9,562) twice on all sites during 2022-2024 growing seasons		
Provide shelter maintenance twice on all sites during 2022-2024 growing seasons		
TOTAL PLANTING BID PRICE		

Company Name:

Address:

Phone:

Email:

Signature:

Date:

Name Printed: